DORMAK LIFETIME GARDEN EQUIPMENTS

catalogue 2023

A RUBUST, RELIABLE AND EFFICIENT RANGE OF PRODUCTS









A factory with a versatile geometry

Dormak's main production unit has an important competitive advantage, which is the diversity of tasks it handles, from cutting thick steel by laser to manual final assembly. Processes such as welding, polishing, painting and drying are steps developed, optimized and controlled internally. No key part of the machine is manufactured outdoors, with the exception of the engine, which reduces the risk of breakdown on assembly lines.

This unit, located in Vagos, Portugal, was expanded in 2022, now totaling 9000m2. The plan for the coming years is even more ambitious, as a response to a growing market demand.

The positioning of Dormak's products is very clear: superior quality with thicker steel than competitor's machines, all at a fair price. "We don't make the lowest priced products", says CEO. "Our machines must be reliable, easy to use and serviceable. This is why, for example, the milling cutters of our tillers are screwed together and not welded, so that they can be repaired even after fifteen years of use. Our motivation is to create a brand where we build the machines ourselves with all our industrial knowhow."

This strategy has proven to be successful in recent years, with Dormak consistently achieving annual growth above 70%. The European interest in products closer to home, with low logistical costs/better delivery times, and higher quality is increasing.





AGRICULTURE





04 LAWN MOWERS
12 SCARIFIERS
16 HIGH GRASS MOWERS
20 SHREDDERS
26 LOG SPLITTERS
32 TILLERS
40 MOTOSPRAYERS
46 RIDERS
50 GARDEN TRACTORS

LAWN MOWERS

Prepare the perfect garden. Lawn mowers must be especially suitable for every lawn whether small, medium or large dimensions. With our Dormak range, you can enjoy petrol and electric lawn mowers, choose the power class and version that best meets your specific needs.



ROBUST

The build quality is present in all models, with reinforced chassis for above average durability.

ERGONOMIC

Prepared to guarantee the highest comfort and maneuverability.

SAFE

Machines prepared and tested for different types of use and with effective security systems.



THE RANGE

CR43 - CR48 - CR55








DORMAK DETAILS



Bold front with interior wheel protection







Bag lid with ergonomic handle

A large part of Dormak's lawn mower line was redesigned based on the success of the CR 43 model, with the focus being to build practical and reliable machines for areas of any size. The bag lid and handlebar grip have been modified to improve user comfort. The wheel covers, a common element in the range, is a Dormak detail already recognized in the market.

WATER







small **areas**



HANDLEBARS INTEGRATED INTO THE CHASSIS

CENTRAL TRANSPORT HANDLE





9 18	product design award
	2013

	CR 43 LS
Engine	AC 1800 230V
Displacement/Power	1800 W
Drive system	Push
Cutting width	430 mm
Cutting height	18 - 60 mm
Recommended Use	800 m ²
Capacity	55 L
Deck Type	Plastic
Cutting Height Adjustment	Central (6 Positions)
Wheels	F:180 mm B:230 mm
Mulching Kit	With mulching cover
Weight	23 Kg



GARDEN

FOREST

AGRI

WATER WATER



EVOLUTION STEP BY STEP...

Dormak followed an ambitious strategy of updating a large part of its range of lawn mowers, to make available more models produces in Europe. The CR 43 project, which took several months to develop and presented sale arguments not seen in any other machine of this size, won awards for innovation and design. Therefore, it only made sense for the rest of the range to be based on the design of this revolutionary machine.

CR 48 & CR 55

Dormak is proud to be the only lawn mower producer in the Iberian Peninsula, and wants to move a step further. With the new 48 and 55 cm steel decks, entirely manufactured in Portugal, the lawn mowers announced this year have the best design and the boldest front on the market. Thought out to the smallest detail, with the incorporation of the opinion of many professionals in the area almost all the components of the machine were improved. From the bag lid to the hand support, with the inclusion of a front bumper, there are many aspects that were revised and that excites about this new machine.

The market spoke and Dormak listened, presenting this year the result of a year of development, totally centered on the needs of the end consumer.







BASED ON SUCCESS Lawn Mower with High Cutting width Effective and easy to use

FOR ALL TYPES OF LAWN



THOUGHT OUT IN DETAIL

The new CR 48 and CR 55 lines are now completely made in Portugal, with the exception of the engine. With a modern steel deck designed and pressed by Dormak, all versions of these machines have a new and more accessible bag fitting system, a 360° adjustable handlebar and a new Dormak bag lid, improved to never break with heavy materials that may enter the bag. The lawn mower range now covers necessities of lawns of any size and is positioned for both leisure and professional end consumers.



#

WATER



48/55CM STEEL DECK



NEW BAG FITTING SYSTEM



PLASTIC HANDLEBAR GRIP



360° ADJUSTABLE HANDLEBAR



BUMPER

PLASTIC LID WITH NEW HANDLE



medium **areas**

Ideal for medium/hi intensity ta	gh	BHPLUS Traction handle Bag li	Ergonomic handlebar id in plastic	
		Centralized adjustment	Ultra to steel d	
	F	F	F	F
	CP /81			
	CR 48 L	CR 48 L PLUS	CR 48 BS PLUS	CR 48 H PLUS
Engine	Loncin	Loncin	B&S 500E	Honda GCVx170
Displacement	Loncin 123 cc	Loncin 166 cc	B&S 500E 140 cc	Honda GCVx170 166 cc
Displacement Power	Loncin 123 cc 2,2 kW	Loncin 166 cc 2,2 kW	B&S 500E 140 cc 2,9 kW	Honda GCVx170 166 cc 3,6 kW
Displacement Power Driving system	Loncin 123 cc 2,2 kW Self-propelled	Loncin 166 cc 2,2 kW Self-propelled	B&S 500E 140 cc 2,9 kW Self-propelled	Honda GCVx170 166 cc 3,6 kW Self-propelled
Displacement Power Christian Compared Power Christian Ch	Loncin 123 cc 2,2 kW Self-propelled 460 mm	Loncin 166 cc 2,2 kW Self-propelled 460 mm	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm
Displacement // Power // Curting system // Curting width // Curting height // Curtin	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm
Displacement // Power // Compared // Compa	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ²	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ²	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm 1500 m ²	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm 1500 m ²
DisplacementIPowerIDriving systemICutting widthICutting heightIRecommended UseICapacityI	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L
DisplacementIPowerIDriving systemICutting widthICutting heightIRecommended UseICapacityIBag TypeI	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm 1500 m2 55 L Dormak	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak
DisplacementIPowerIDriving systemICutting widthICutting heightIRecommended UseICapacityIBag TypeIDeck TypeI	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel
DisplacementIPowerIDriving systemICutting widthICutting heightIRecommended UseICapacityIBag TypeIDeck TypeI	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm 1500 m2 55 L Dormak	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak
DisplacementIPowerIDriving systemICutting widthICutting heightIRecommended UseICapacityIBag TypeIDeck TypeICutting height adjustmentI	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Normal	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Ergonomic	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Ergonomic	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Ergonomic
DisplacementIPowerIDriving systemICutting widthICutting heightIRecommended UseICapacityIBag TypeIDeck TypeICutting height adjustmentIHandlebar TypeIWheelsI	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak 55 L Dormak Steel Center (7 Positions) Normal F:180 mm B: 230 mm	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Ergonomic F:180 mm B: 230 mm	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Ergonomic F:180 mm B: 230 mm	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm 1500 m2 55 L Dormak Steel Center (7 Positions) Ergonomic F:180 mm B: 230 mm
DisplacementIPowerIDriving systemICutting widthICutting heightIRecommended UseICapacityIBag TypeIDeck TypeICutting height adjustmentIHandlebar TypeI	Loncin 123 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Normal F:180 mm	Loncin 166 cc 2,2 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Ergonomic F:180 mm	B&S 500E 140 cc 2,9 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Ergonomic F:180 mm	Honda GCVx170 166 cc 3,6 kW Self-propelled 460 mm 30- 80 mm 1500 m ² 55 L Dormak Steel Center (7 Positions) Ergonomic F:180 mm



big **areas**

Ideal for high intensity tasks









	CR 55 L PLUS	CR 55 BS PLUS	CR 55 H PLUS
Engine	Loncin	B&S 675 EXI	Honda GCVx200
Displacement	166 cc	163 cc	196 cc
Power	2,9 kW	2,68 kW	4,2kW
Driving system	Self-propelled	Self-propelled	Self-propelled
Cutting width	530 mm	530 mm	530 mm
Cutting height	30- 80 mm	30- 80 mm	30- 80 mm
Recommended Use	3000 m ²	3000 m ²	3000 m ²
Capacity	70 L	70 L	70 L
Bag Type	Net	Net	Net
Deck Type	Steel	Steel	Steel
Cutting height adjustment	Center (7 Positions)	Center (7 Positions)	Center (7 Positions)
Handlebar Type	Ergonomic	Ergonomic	Ergonomic
Wheels	F:180 mm B: 230 mm	F:180 mm B: 230 mm	F:180 mm B: 230 mm
Bumper	Yes	Yes	Yes
Weight	40 Kg	40 Kg	40 Kg




GARDEN

FOREST

AGRI AGRI WATER

SCARIFIERS

Scarifying removes the moss and the layer that suffocates lawns. This removal encourages healthy root growth by applying water, air and nutrients to the soil. Scarifying in spring and autumn strengthens your lawn!

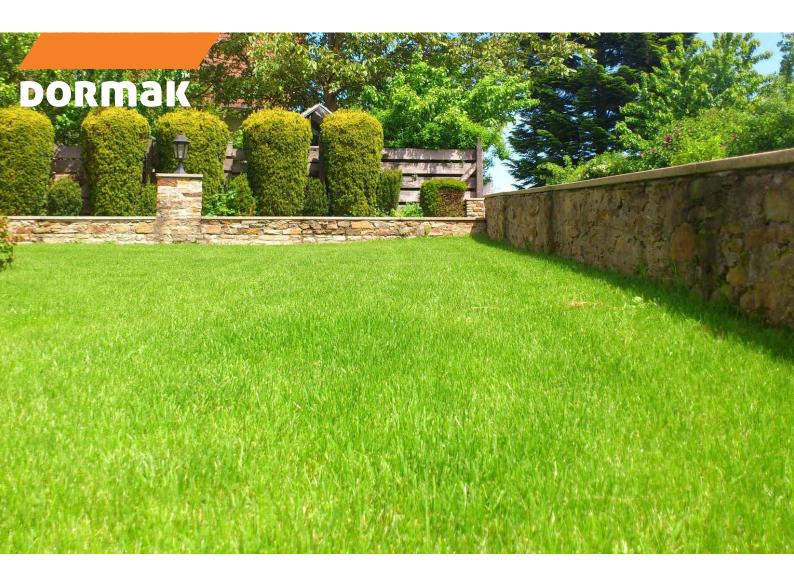

VERSATILITY

Machines with height-adjustable handlebar and central cutting height controller.

COMPACT WHEELS

Equipment prepared and tested for different scenarios of use and with effective security systems.

PRACTICAL SOLUTION

For quick and easy housekeeping.

STEEL PLATFORM

Steel decks for greater strength and durability.



THE RANGE

SC40 - SC45 - SC490 - SC520



highlight SC 520 PRO



DORMAK DETAILS



Professional aluminum wheels or Dormak rims



Centralized cutting height adjustment



Height-adjustable handlebar


Dormak scarifiers offer a complete range for all areas of work, from 500 to 2500 m2, with typical Dormak wheel covers for the smaller models and aluminum wheel covers for the more professional ones. All models have a central or front lever for adjusting the height of the deck and a handlebar that is adjustable to the user's height.





small **areas**



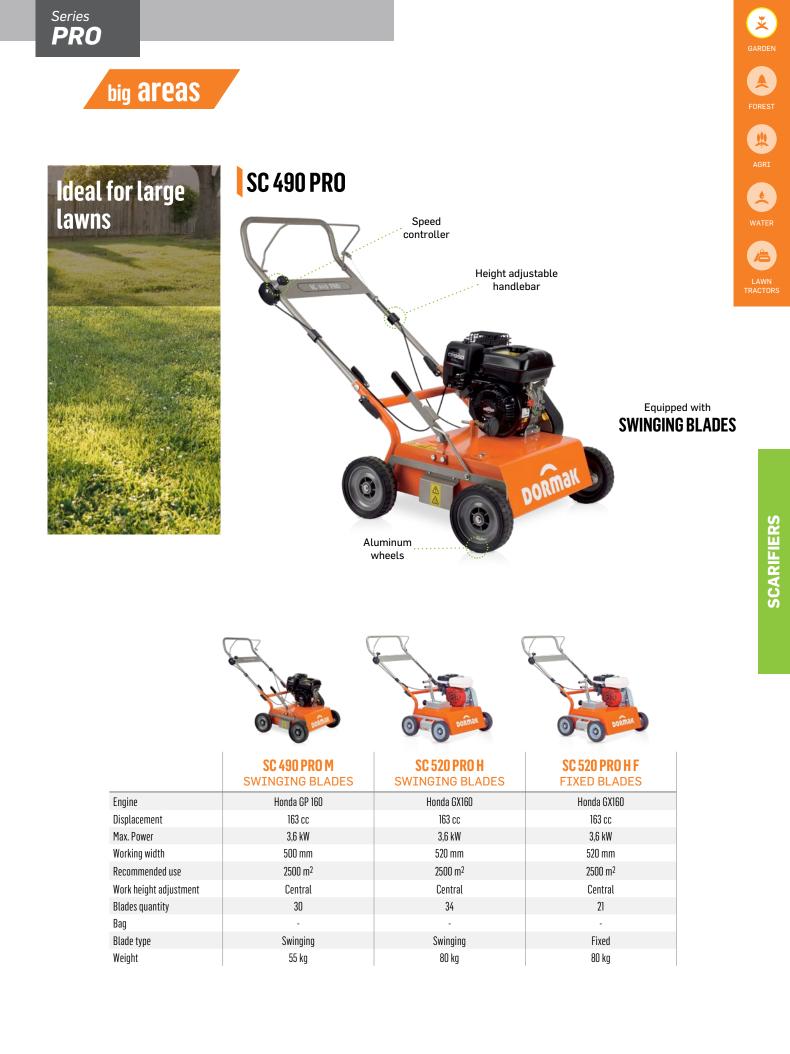



HIGH GRASS MOWERS

Our equipment is manufactured to be used in difficult working areas, extremely dense vegetation and uneven lawns. Allowing impeccable work with less effort and ensuring maximum safety, these machines can be used for domestic or professional tasks.



EASY TRANSPORTATION CUTTING SYSTEM

3 wheel system that alows easy handling and rapid change of course.

Single blade system.

RESISTANT STRUCTURES

Equipment with resistant chassis and deck for long hours of intense work.



THE RANGE

TD50 - EP50 - EP53 - SP51 - SP65



highlight SP 65 H



DORMAK DETAILS



Transmission box for 5F+1R speeds



Large or pneumatic wheels



Height-adjustable front wheel

Dormak high grass mowers have always been a differentiating product in the market. Developed to work with high grass and deal with more difficult lawns, these machines are always EQUIPPED with large or pneumatic wheels for easy transport, and a front smaller wheel for reinforced support. All models are self-proppelled.





small **areas**





	TD 50 L	EP 50 BS	EP 53 H	EP 50 BS - 4	EP 53 H - 4
Engine	Loncin	B&S 675 EXi	Honda GCVx170	B&S 650 EXI	Honda GCVx170
Power	166 cc	163 cc	166 cc	165 cc	166 cc
Displacement	2,9 kW	2,9 kW	3,3 kW	2,9 kW	3,6 kW
Working width	520 mm	520 mm	520 mm	520 mm	510 mm
Recommended use	2000 m ²				
Work height adjustment	3 positions				
Cutting system	Blade	Blade	Blade	Blade	Blade
Speed	1F	1F	1F	1F	1F
Cutting height	40 - 80 mm	40 - 80 mm	40 - 80 mm	45 - 90 mm	45 - 90 mm
Clutch	Yes	Yes	Yes	Yes	Yes
Transmission type	Belt + transmission Box				
Deck	Steel	Steel	Steel	Steel	Steel
Driving system	Self-propelled	Self-propelled	Self-propelled	Self-propelled	Self-propelled
Tipe wheels	Plastic with bushing				
Weight	50 kg	50 kg	50 kg	51 kg	51 kg



big **areas**

Ideal for fields of big dimensions









SP 51 BS SP 65 H Honda GCVx200 B&S 850 Engine 190 cc 201 cc Power Displacement 3,6 kW 4,2 kW Working width 520 mm 620 mm Recommended use 2500 m² 3000 m² Work height adjustment 4 positions 4 positions Cutting system Blade Blade Speed 4F + 1T 4F + 1T Cutting height 34 - 120 mm 34 - 120 mm Clutch Yes Yes Belt + Transmission Box Transmission type Belt + Transmission Box Deck Steel Steel Self-propelled Self-propelled Driving system Tipe wheels Plastic wheels with bushing Pneumatic Wheel Weight 60 kg 74 kg



SHREDDERS

Intended for ecology and reuse of organic materials, the shredders carry out your composting tasks. Choose between one of the available electric, combustion or tractor models, the needed power and destroy all organic matter such as branches, pruning or leaves, leaving your space clean whether it is a garden, vegetation, orchard, olive grove, among others.



EASY TRANSPORTATION CUTTING SYSTEM

Handle and pair of wheels that allow easy transport of the equipment.

BLADES TREATMENT

Low temperature tempered blades to obtain extremely high hardness indexes.

Triangular blades or hammers to destroy efficiently all types of substances.

VENTILATION SYSTEM

Ventilation system designed and engineered to optimize material flow inside the shredder.



THE RANGE SH40 - SH50 - SH75 - SH85



highlight SH 85 H



DORMAK DETAILS



2-legged support table





Ergonomic handle

Dormak shredders, a long and one of the most distinguishable line of products from the brand, offer great stability during usage through a support table with 2 legs instead of 1. The output tunnel can be adjusted to 4 different directions by the user, offering complete flexibility. All the models in the range are easy to transport due to the top or side handle located on the entry tunnel.

tunnel

SHREDDER






low shredding





Series **HOME**

medium shredding

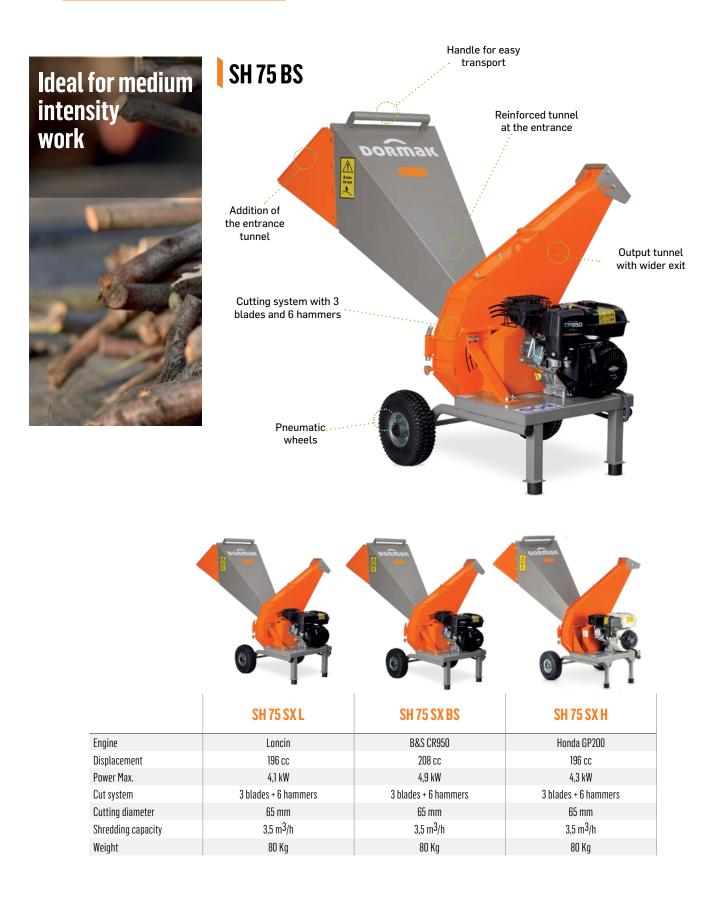



intense **Shredding**









LOG SPLITTERS

A perfect tool to cut logs. Effortlessly and safely cut the firewood for your fireplace. Ideal for both leisure and private use with smaller logs and for professionals with an objective to sell the wood. Dormak offers a wide range from 8 to 15 tons of force, with equipment of high resistance, very productive and reliable.



3 POSITIONS

Possibility of cutting wood with the machine placed in a vertical, horizontal or oblique position.

WHEELS

Kit of wheels for easy transportation, making it easy to move the machine to difficult areas.

SPEED

Variable speed system.

VARIOUS POWER Supply systems

Range with various power supply alternatives such as combustion, electric, and 3-point (tractor) system.



THE RANGE RL8 - RL10 - RL12 - RL15



WATER

highlight RL 12 H3



DORMAK DETAILS



Reinforced cutting wedge



Levers for speed control and safety




Tunnel with reinforced support

Dormak log splitters offer a complete range adaptable to the needs of each consumer. Include a variable speed system, controlled by two levers located on the top of the frame, a cutting wedge that can handle logs of all sizes and are very easy to handle.





8/10 tonnes

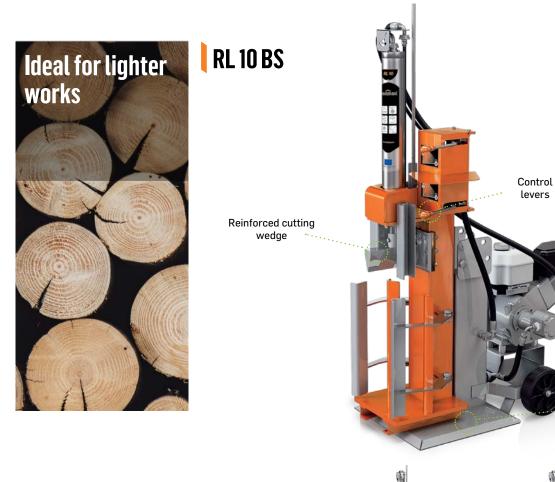

Reinforced iron support base







	RL 8 HRZ	RL 10 EL	RL 10 BS
Engine	Electric	Electric	B&S CR950
Displacement	-	-	208 сс
Power	1,8 kW	2,2 kW	4,75 kW
Max. pressure	8 ton	10 ton	10 ton
Max. diameter	360 mm	360 mm	360 mm
Speed	Variable	Variable	Variable
Wheels	2	2	2
Hydraulic Oil Tank Capacity	8.5 L	6.5 L	6.5 L
Maximum length of logs	550 mm	550 mm	550 mm
Working positions	1	1	3
Weight	130 Kg	130 Kg	130 Kg





12 tonnes

Ideal for in and profes work	ssional	2 H3		Control levers	AGRI AGRI WATER LAWN TRACTORS
				Engine Eletric	LOG SPLITTERS
	RL 12 EL	RL 12 H	RL 12 BS	RL 12 H3	Ľ
Engine	Eletric	Honda GX160	B&S CR950	Honda GP 200	
Displacement	-	163 cc	208 cc	196 cc	
Power	2200 W	3,6 kw	2,2 kW	4,3 kW	
Max. pressure	12 ton	12 ton	12 ton	12 ton	
Max. diameter	425 mm	425 mm	425 mm	4250 mm	
Speed	Variable	Variable	Variable	Variable	
Wheels	2	2	2	2	
Hydraulic Oil Tank Capacity	7,5 L	7,5 L	7,5 L	7,5 L	
Maximum length of logs	700 mm د	700 mm	700 mm	700 mm	
Working positions	3 172 Ka	3 172 Kg	3 172 Kg	3	
Weight	172 Kg	172 Kg	172 Kg	172 Kg	

GARDEN

FOREST







RL 15 TRC



3-POINT SYSTEM ATTACHABLE TO TRACTOR Recommended for tractor <50 Hp (a 1500 rpm)

C.



Reinforced iron support base

	RL15 TRC
Engine	PTO
Displacement	-
Power	-
Max. pressure	15 ton
Max. diameter	700 mm
Speed	Variable
Wheels	2
Hydraulic Oil Tank Capacity	7,5 L
Maximum length of logs	700 mm
Working positions	3
Weight	172 Kg







TILLERS

An extensive range that covers all the needs when preparing the land. Extremely efficient machines with various engines that are easy to manoeuvre and can be used for both private and professional work.





Steel chassis and reinforced structure

EASY TO USE

Ergonomic fixed or adjustable handlebars, allowing better comfort of use

WIDE RANGE OF ACCESSORIES



THE RANGE MD35 - MD45 - MD50 - MD60



highlight MD 60 H PLUS



DORMAK DETAILS



Front wheel for easy transport



Screw blades for easy replacement



Handlebars that are adjustable in height

Dormak tillers are very versatile machines. The range covers the needs of all types of work, from smaller machines for hoeing to those for more intensive work where higher speeds are required. With front or rear transport wheel solutions, multi-position handlebars and bolt-on or welded blades, everything is adaptable to the needs of each user.



MD 35

POWERFUL AND COMFORTABLE TILLER

NEW

Thought out in detail.....

The new MD 35 tiller has been thought and designed with portability as a main criteria, keeping the width of the blades for more demanding works. Light and compact, this tiller has a double rear wheel and a depth control indicator, being a versatile machine, serving both for hoeing and digging. It replaces the older and much requested MD 40, to make the range wider to cover all necessities.



POWERFUL TILLER

COMFORTABLE TILLER

ADAPTED TO YOUR NEEDS



PORTABILITY Combined with a good working width



DOUBLE REAR FOLDING WHEEL



RIGID PLASTIC STRUCTURE



KEVLAR BELT



QUICK CONNECT HANDLEBAR



DEPTH CONTROL

MADE IN EURO



GARDEN

FOREST

AGRI

WATER WATER

TILLERS





medium **areas**

ldeal for medium intensity work











MD 50 H ECO

	MD 45 L	MD 50 L ECO	MD 50 BS ECO	MD 50 H ECO
Engine	Loncin	Loncin	B&S CR750	Honda GP 160
Hp/kW/cc	79 сс	6,6Hp / 4,1kW / 196cc	- / 3,3kW / 163cc	4,8Hp / 3,6kW / 163cc
Speed	1F+1T	1F + 1T	1F + 1T	1F + 1T
Transmission	Belt	Belt	Belt	Belt
Working width	600 mm	600 mm	600 mm	600 mm
Handlebar	Height adjustable	Height adjustable	Height adjustable	Height + side adjustable
Blade type	Dig	Dig	Dig	Dig
Depth control	Fixed	Fixed	Fixed	Fixed
Transport wheels	1	1	1	1
Chassi	2 mm	2 mm	2 mm	2 mm
Weight	38 Kg	52 Kg	52 Kg	52 Kg



medium **areas**







big **areas**





ADJUSTABLE RUG OPENER AB01 Ref. 205000000AB01

ADJUSTABLE RUG OPENER MD50 and MD60 Ref. 205000000AEON

ADJUSTABLE DRESSER WITH METAL WHEELS MD60 Ref. 2050600000CRA

RIGGERS WITH METALLIC WHEELS MD50 Ref. 205000CRATK54



REVERSIBLE PLOW Fixed RODS MD50 and MD60 Ref. 205000000VF00



ADDITIONAL STAR PAIR MD50 (includes mudguard) Ref. 050000061679



SCREW BLADES (STD) COMPLETE MD60 Ref. 2050600000650

SCREW BLADES (STD) COMPLETE MD60 Ref. 2050600000600

Ref. 205001EM041FP SCREW BLADES (STD) COMPLETE MD50 Ref. 205000000D320

ACCESSORIES



SCREW BLADES MD40

POTATO PULLERS MD50 and MD60 **Ref. 205000000AP00** POTATO PULLERS AR01 **Ref. 205000000AR01**



PAIR OF WHEEL WEIGHTS 400.08 29KG MD50 and MD60 Ref. 20500PT400.08



PAIR OF PNEUMATIC WHEELS RPUT + HEXAGUNAL AX **Ref. 205000000RP01** WHEELS PAIR 500.10 C/ HEXAGONAL SHAFT MD600 **Ref. 205060RT50010**

Ref. 20506000004-8 PAIR OF PNEUMATIC WHEELS RP01 + HEXAGONAL AXLESS

Ref. 2050004-8-305 WHEEL PAIR 400.08 W/ FIXED AXIS HEXAGON MD600

WHEEL PAIR 400.08 W/ FIXED AXIS 305mm (round shaft) MD50

WHEEL PAIR 400.08 W/ FIXED AXIS 205mm (round shaft) MD50 Ref. 20500000004-8



METALIC WHEEL PAIR RM01 Ref. 205000000RM01

METALIC WHEELS PAIR MD60 Ref. 20506000KIT+E

METALIC WHEELS PAIR MD50 Ref. 2050000540KIT



TILLERS



SPRAYERS

A spayer or a motosprayer is a great help for agricultural and disinfestation tasks. With Dormak's wide range of products, you can address any necessity for tasks of pulverization of pesticides, herbicides, and fertilizers. With capacity for several meters of hose, it allows you to make a collective or individual application on plants, shrubs and trees as well as in vegetable gardens and vineyards.



TRANSPORTABLE

With a metal stand, wheels and handles you can move your sprayer anywhere.


VARIOUS DISTANCES

It can be equipped with a reel and various hose sizes, allowing the user to increase its range of action.

VARIOUS ENGINES

Choose your engine, between lighter and stronger powers, so you can adapt to the necessity of your work.





highlight SD 100



DORMAK DETAILS



Reel for 50 meters of hose



Large wheels adapted to capacity



Wide deposit entrance

Dormak motosprayers have one of the most attractive designs on the market and are equipped with a high quality reel and hose, where every component is made in Europe. The models are all extremely balanced, thanks to the system of 1 or 2 wheels depending on their capacity.



SPRAYERS













100 liters



SD 100/40 H PRO



structure

GARDEN

FOREST

AGRI

WATER WATER

EQUIPPED WITH:

Spear 60 cm + 10 m hose, does not include reel neither its structure.



	SD 100/20 L	SD 100/20 BS	SD 100/25 L	SD 100/40 H PRO
Engine	Loncin	B&S CR 750	Loncin	Honda GX160
Hp / kW / cc	79 cc	163 cc	4,1 Kw / 196 cc	5,5 Hp / 4,1 kW / 163 cc
Type of engine	4 T	4 T	4 T	4 T
Pump	20 bar	20 bar	25 bar	40 bar
Spear	60 cm	60 cm	60 cm	60 cm
Deposit Cap.	100 L	100 L	100 L	100 L
Wheels	2	2	2	2
Type of pump	Double membrane	Double membrane	Double membrane	Double membrane

* merely figurative engine image





no **deposit**

EQUIPPED WITH

Spear 60cm + 10m hose + Suction hose



EQUIPPED WITH: Spear 60 cm + 10 m hose, does not include reel neither its structure.



	SD 14 DK	SD 20 L	SD 20 BS	SD 25 L	SD 40 HX
Engine	Dormak	Loncin	B&S 750	Loncin	Honda GX160
Hp / kW / cc	25 cc	5,5 Hp / 4,1 kW / 196 cc	-/ 3,3 kW / 163cc	5,5 Hp / 4,1 kW / 196 cc	5,5 Hp / 4,1 kW / 163 cc
Type of engine	2 T	4 T	4 T	4 T	4 T
Pump	14 bar	20 bar	20 bar	25 bar	40 bar
Spear	60 cm	60 cm	60 cm	60 cm	60 cm
Deposit Cap.	-	-	-	-	-
Wheels	Chassi + Wheels	Handle + wheels	Handle + wheels	Handle + wheels	Handle + wheels
Type of pump	Piston	Double membrane	Double membrane	Double membrane	Double membrane

* merely figurative engine image







HELIVYL TUBE P50 8mm 50 BAR

ROLL 100 mt Ref. 2028A0242.100

ROLL 50 mtt **Ref. 2028A0242.050**

ROLL 25 mt **Ref. 2028A0242.025**

HELIVYL TUBE P20 8MM 20 BAR



* Does not include hose

MOTOSPRAYER REEL 50M *

MOTOSPRAYER REEL PARA 100M * Ref. 202A000000005

Ref. 202A00000004



Series **PRO**

ACCESSORIES

GARDEN GARDEN FOREST AGRI AGRI WATER WATER



SPEAR 0,60m **Ref. 202A000000001**

SPEAR 1m **Ref. 202A00000002**

SPEAR 1,5m **Ref. 202A000000003**

REEL STRUCTURE 50M (100L) Ref. 202A000000010 REEL STRUCTURE DE 100M (100L) Ref. 202A000000009



RIDERS

Dormak

Dormak's riders promise a unique experience with the new range of lawn tractors. Built and designed from scratch, they feature top of the range transmission and enough power to tackle any type of terrain, whether low or tall grass.

SAFE

Presence of elements such as a superior protection ring against accidents to make the user comfortable and confident.

DESIGN

Based on the best references on the market, the design was thought to reflect the Dormak brand and present the most beautiful and comfortable tractor to handle.

ROBUST

The build quality is present in every detail of the machine, with a reinforced chassis for long term durability.





HOME

GARDEN

FOREST


AGRI

highlight RXH 95

DORMAK DETAILS



Innovative cutting system for greater efficiency





Protective frame with hinge

Dormak riders are designed with a pioneering cutting system, crash protection rim and pneumatic wheels to tackle any surface. The front and rear bumpers help both to lower tall grass for cutting and to protect in adverse situations. They have a pedal system instead of a lever in the bigger model for greater comfort, with variable forward and reverse speeds.

system



RIDERS



INNOVATION RIDER

DORMAK

EVOLUTION STEP BY STEP...

In 2021, Dormak decided to start producing Riders, a pioneering project in Portugal, which involved a major I&D effort for over a year.

DORMAK

Following an ever-increasing need for riders, Dormak is increasing its offer in more professional segments for the treatment of larger areas.

The engines offered guarantee more than enough power from easy surfaces to the most demanding ones.

The machines have been tested over many months and fine-tuned according to the user's efficiency and comfort.

It has the innovative **Dormak Cutting System**, a transmission of the highest performance, pedal or lever for accelleration dependind on the model, brake system, among other details that promise to surprise you.

DORMAK CUTTING SYSTEM (DCS)

An innovative blade system developed by Dormak based on its know-how and best market practices. The **Dormak Cutting System** is composed by:

1) a mulching blade

2) a blade with loose ends, flexible to absorb impact from stones and other hard materials without any difficulty. Makes cutting significantly more effective.







	RXH 80 16	RXH 80 20	RXH 95 16	RXH 95 20
Engine	Loncin	Loncin	Loncin	Loncin
Displacement	452 cc	608 cc	452 cc	608 cc
Power	16,5 Hp	20 Hp	16,5 Hp	20 Hp
Recommended Use	7500 m ²	7500 m ²	10000 m ²	10000 m ²
Cutting Width	780 mm	780 mm	860mm	860mm
Cutting system	DCS	DCS	DCS	DCS
Cutting height	Min. 40 mm Max. 110 mm	Min. 40 mm Max. 110 mm	Min. 40 mm Max. 110 mm	Min. 40 mm Max. 110 mm
Mulching	Yes	Yes	Yes	Yes
Transmission	Hydro Gear T3	Hydro Gear T3	Hydro Gear G700	Hydro Gear G700
Clutch de Blade	Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic
Collection bag	No	No	No	No
Acceleration system	Lever	Lever	Pedal	Pedal
Speed	Continuous speed from OKm to 9Km/h	Continuous speed from OKm to 9Km/h	Continuous speed from OKm to 9Km/h	Continuous speed from OKm to 9Km/h
Wheels	Front 13" X 5" - 6" Back 16" X 6.5" - 8"	Front 13" X 5" - 6" Back 16" X 6.5" - 8"	Front 16" X 6.5" - 8" Back 20" X 10" - 8"	Front 16" X 6.5" - 8" Back 20" X 10" - 8"
Dimensions (H x W x L)	190 cm x 102 cm x 170 cm	190 cm x 102 cm x 170 cm	200 cm x 102 cm x 170 cm	200 cm x 102 cm x 170 cm
Weight	280 Kg	292 Kg	300 Kg	312 Kg



GARDEN GARDEN FOREST

AGRI

WATER WATER

49

GARDEN TRACTORS

Our ride-on mowers are prepared to perform any type of work quickly and with ease. They have the versatility needed to ensure comfort and control, guaranteeing you safe use. Leave the lawn well-kept and charming, for you to enjoy it to the fullest!





Equipment tested and prepared for various scenarios with effective security systems

DESIGN

Designed and developed for a perfect combination of elegant lines, performance and comfort in handling the machine.

ROBUST

Build quality is present in every detail of the machine, with a reinforced chassis for above average durability.





¥

FOREST

WATER

highlight TXH 105 PRO



DORMAK DETAILS



Hydrostatic



Centralized regulation cutting height



Cutting system with 2 blades

The range of tractors Dormak presents a very varied offer, from leisure to more professionals.





big **areas**

Ideal for professional work on larger areas



TXH 95 DK



Frontal bumper protection



HYDROSTATIC



2 BLADES



HEIGHT ADJUSTMENT CENTRALIZED FOR 6 POSITIONS



ELECTROMAGNETIC BLADE CLUTCH

DETAILS OF TXH95 DK AND TXH 105 PRO



Small turning radius, allows a comfortable ride and excellent obstacle avoidance



Large smooth lawn tires



Simple capot opening for engine access



Equipped with LED lights



Deck equipped with wheels for uniform cutting



Command elements ergonomically arranged







TXH 105 PRO

Simplify cutting and maintenance tasks in your garden and have more time for what you enjoy most.



Automatic collection bag



	TXH 95 DK	TXH 105 PRO
Engine	Dormak Euro 5	B&S Intek 7160 V2
Displacement	452 cc	656 cc
Power	7,7 kW / 2600 rpm	9,1 kW / 2450 rpm
Recommended Use	7000 m ²	8000 m ²
Cutting Width	950 mm	1020 mm
Cutting system	2 Blades	2 Blades
Cutting Height	6 Positions 30 to 80 mm	6 Positions 30 to 80 mm
Mulching	No	No
Transmission	Hydrostatic	Hydrostatic
Blade clutch	Electromagnetic	Electromagnetic
Collection bag	220 L	300 L
Speed	Variable	Variable
Wheels	Front 15" x 6.0" - 6" Back 18" x 8.5" - 8"	Front 15" x 6.0" - 6" Back 18" x 8.5" - 8"
Dimensions (L x W x H)	239 x 102 x 114 cm	239 x 110 x 114 cm
Weight	227 Kg	242 Kg







For professional work on larger areas





Protection bumper

	DK 86 H	DK 92 H	DK 102 H
Engine	Dormak	Dormak	Dormak
Displacement	452 cc	546 cc	686 cc
Recommended Use	3500 m ²	3500 m ²	5000 m ²
Cutting Width	860 mm	920 mm	1020 mm
Cutting system	2 Blades	2 Blades	2 Blades
Cutting Height	8 Positions 30 to 80 mm	7 Positions 30 to 80 mm	8 Positions 30 to 80 mm
Mulching	Yes	Yes	Yes
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Blade clutch	Electromagnetic	Electromagnetic	Electromagnetic
Collection bag	245 L	245 L	245 L
Speed	0 to 9 km/h	0 to 9 km/h	O to 9 km/h
Wheels	Front 15" x 6.0" Back 18" x 8.5"	Front 15" x 6.0" Back 18" x 8.5"	Front 15" x 6.0" Back 18" x 8.5"
Dimensions (L x W x H)	242 x 110 x 114 cm	242 x 110 x 114 cm	242 x 110 x 114 cm
Weight	210 Kg	215 Kg	221 Kg





For professional work on larger areas





Protection bumper

	DK 86 SH	DK 98 SH	DK 108 SH
Engine	Dormak	Dormak	Dormak
Displacement	352 cc	552 cc	546 cc
Recommended Use	2500 m ²	2500 m ²	5000 m ²
Cutting Width	860 mm	980 mm	1080 mm
Cutting system	2 Blades	2 Blades	2 Blades
Cutting Height	8 Positions 30 to 80 mm	7 Positions 30 to 80 mm	8 Positions 30 to 80 mm
Mulching	Yes	Yes	Yes
Transmission	Hydrostatic	Hydrostatic	Hydrostatic
Blade clutch	Electromagnetic	Electromagnetic	Electromagnetic
Collection bag	-	-	-
Speed	0 to 9 km/h	0 to 9 km/h	0 to 9 km/h
Wheels	Front 15" x 6.0" Back 18" x 8.5"	Front 15" x 6.0" Back 18" x 8.5"	Front 15" x 6.0" Back 18" x 8.5"
Dimensions (L x W x H)	187 x 86 x 104 cm	187 x 86 x 104 cm	187 x 86 x 104 cm
Weight	190 Kg	192 Kg	195 Kg



GARDEN

FOREST

AGRI

WATER

NOTES)
-------	---



NOTES



NOTES	





Visit our online store and be surprised with our entire range of products.

www.dormak.pt



MORE THAN DEVELOPING TOOLS, WE WORK TO EARN TRUST AND DELIVER QUALITY.

More than developing new products, we develop our own technologies, because we chart our own path. Differentiation, efficiency, pleasure of use and a good service is always at the center of our strategy.



Zona Industrial de Vagos, Lote 97/98 3840-385 Vagos, Portugal T. +351234914686 F. +351234912032

info@dormak.pt